

AEDC-TR-66-254

FEB 3 1967

JAN 17 1968

JUN 15 1988

JUN 13 1991




**SIMULATION OF CHEMILUMINESCENT REACTION
OF NITRIC OXIDE WITH ATOMIC OXYGEN IN A
SUPERSONIC LOW DENSITY WIND TUNNEL - PART 2**

Jan A. van der Blik and Robert A. Cassanova
ARO, Inc.

**TECHNICAL REPORTS
FILE COPY**

January 1967

PROPERTY OF U.S. AIR FORCE
AEDC TECHNICAL LIBRARY



Distribution of this document is unlimited.

**AEROSPACE ENVIRONMENTAL FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE**

PROPERTY OF U. S. AIR FORCE
AEDC LIBRARY
AF 40(600)1200

NOTICES

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

SIMULATION OF CHEMILUMINESCENT REACTION
OF NITRIC OXIDE WITH ATOMIC OXYGEN IN A
SUPERSONIC LOW DENSITY WIND TUNNEL - PART 2

Jan A. van der Blik and Robert A. Cassanova
ARO, Inc.

Distribution of this document is unlimited.

FOREWORD

This report presents results of the second series of wind tunnel tests of an atmospheric probe model. The project is a joint effort of the Air Force Cambridge Research Laboratories (AFCRL), Arnold Engineering Development Center (AEDC), and Mithras, Inc., Cambridge, Massachusetts. The investigation is being conducted by D. Golomb and F. P. DelGreco of AFCRL, R. E. Good of Mithras, Inc., and J. A. van der Blik and R. A. Cassanova of AEDC under Program Element 62405424, Project 7635.

The results of tests presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the AEDC, Air Force Systems Command (AFSC), Arnold Air Force Station, Tennessee, under Contract AF 40(600)-1200. The tests were conducted from March 14 to April 29, 1966, under ARO Project No. SB0609, and the manuscript was submitted for publication on November 18, 1966.

This technical report has been reviewed and is approved.

Frank N. Price, Jr.
Lt Col, USAF
AF Representative, AEF
Directorate of Test

Leonard T. Glaser
Colonel, USAF
Director of Test

ABSTRACT

Low density wind tunnel tests were carried out at Mach 2 and 3 to simulate the release of nitric oxide in the upper atmosphere from a sounding rocket. The supersonic flow contained atomic oxygen, and the wall-less chemiluminescent reaction of O with NO was investigated. Reaction rate constants thus obtained were up to 5 orders of magnitude higher than previously obtained laboratory rate constants. This is an extension of the work reported in AEDC-TR-66-105.

CONTENTS

	<u>Page</u>
ABSTRACT	iii
NOMENCLATURE	vi
I. INTRODUCTION	1
II. CURRENT STATUS AND EXTENT OF TESTS	1
III. LOW DENSITY WIND TUNNEL	2
IV. MODELS AND PROCEDURE	3
V. EXPERIMENTAL RESULTS	4
VI. CONCLUDING REMARKS	7
REFERENCES	7

APPENDIX

Illustrations

Figure

1. Summary of Atomic and Molecular Oxygen Measurements	11
2. Schematic of Low Density Tunnel (Aerospace Research Chamber (8V))	12
3. Atomic Oxygen Calibration Results	13
4. Geometry of Test Model	14
5. Film Negative Calibration	15
6. Typical Photograph of Headglow	16
7. Sketch of Headglow Flow Field	17
8. Typical Variation of Headglow Radiation with NO Concentration in Forward Jet, $p'_O = 25\mu$ Hg	18
9. Typical Variation of Headglow Radiation with NO Concentration in Forward Jet, $p'_O = 82\mu$ Hg	19
10. Summary of Photon Production Rates at Stagnation Point, Determined from Photographs	20

NOMENCLATURE

E	Exposure
h	Planck's constant
I	Intensity of transmitted light
k	Rate constant
M	Mach number
\dot{M}	Mass flow rate
n	Particle density
p	Pressure
Re	Reynolds number
T	Temperature
T_R	Relative transmission of film negative
t	Time
u	Velocity
α	Degree of dissociation for oxygen
λ	Mean free path
ν	Frequency of emitted light
Φ	Photon emission rate per unit volume at stagnation point

SUBSCRIPTS

j	Jet
NO	Nitric oxide
o	Stagnation conditions
∞	Free-stream conditions

SUPERSSCRIPTS

'	Stagnation conditions behind normal shock
*	Excited state

SECTION I

INTRODUCTION

A new method of determining atomic oxygen (O) profiles in the altitude range of from 90 to 140 km has been developed by Golomb et al., Ref. 1. Nitric oxide (NO) was released at a known rate from a rocket at night. The radiation in the mixing zone, the so-called headglow, was analyzed using ground-based cameras. Extremely high radiation intensity was observed, which was incompatible with the laboratory rate constant of the reaction $\text{NO} + \text{O} \rightarrow \text{NO}_2 + h\nu$. Also, the aerodynamic model used in the data reduction was unrealistic. Wind tunnel tests (reported in Ref. 2) were carried out to provide a calibration of the headglow, and based on these results Golomb and Good, Ref. 3, re-evaluated the flight data.

This report deals with wind tunnel tests carried out in 1966. The work will be continued with wind tunnel tests in early 1967.

The purpose of this series of tests was to obtain additional data for $M_\infty = 3$ at $T_O = 290, 550, \text{ and } 700^\circ\text{K}$ and to extend the range of tests to include $M_\infty = 2$ at $T_O = 290^\circ\text{K}$. The latter condition resulted in reaction zone pressures closer to those of previous laboratory tests.

SECTION II

CURRENT STATUS AND EXTENT OF TESTS

The results and analysis of experiments carried out at AEDC have been reported in Refs. 2, 4, 5, and 6. The early rocket flights, Ref. 1, and their re-evaluation, Ref. 3, are concerned with a model with two side orifices. The atomic oxygen concentrations of Ref. 3, based on wind tunnel calibration, are reproduced in Fig. 1. For comparison, the total particle concentration from the U. S. Standard Atmosphere, 1962¹ and the measured molecular oxygen (O_2) concentrations reported in Ref. 7 are also given in this figure.

With a model having one forward facing orifice, an effective rate constant for the reaction of NO and O was determined in the wind tunnel and reported by DelGreco et al., Ref. 4. The photon emission rate

¹U. S. Standard Atmosphere, 1962, U. S. Government Printing Office, December 1962.

constant as determined from photographs from the headglow in the wind tunnel was

$$k = \frac{\Phi}{[\text{NO}] [\text{O}]} = 2.4 \times 10^{-12} \text{ cm}^3 \text{ molecule}^{-1} \text{ sec}^{-1}$$

as compared to the rate constant

$$k = 6.4 \times 10^{-17} \text{ cm}^3 \text{ molecule}^{-1} \text{ sec}^{-1}$$

measured by Fontijn et al. in a chemical flow tube, Ref. 8.

The rocket flights reported by Golomb et al., Ref. 1, produced a glow with photon emission rates in line with the wind tunnel data. Spindler, Ref. 9, reported also unexpectedly high photon emission rates from NO released by rockets; however, no direct comparison of k for this test could be made because of a lack of aerodynamic data of the rocket flow pattern.

The use of the supersonic wind tunnel for chemical reaction studies offers the unique advantage of producing wall-less reactions heretofore only produced by molecular beams at much lower pressures and constituent concentrations. However, the mixing process in the present aerodynamic configuration needs further investigation before an explanation of the observed reaction rates can be made.

SECTION III LOW DENSITY WIND TUNNEL

The tests were conducted in the Aerospace Research Chamber (ARC (8V)) of the Aerospace Environmental Facility at AEDC. The chamber, operated as a low density wind tunnel, is shown in Fig. 2. The chamber is 8 ft in diameter and 16 ft long. The nozzles are mounted on a removable dished head.

The pumping equipment of the chamber consists of a 6-in. oil diffusion pump in series with a 60-liter/sec mechanical pump and cryopumping surfaces. The major pumping action during a tunnel run is provided by a series of radially positioned cryopanel cooled with gaseous helium (GHe) at temperatures from 15 to 20°K with a total area of 240 ft². The GHe is cooled in a continuously operating 1-kw refrigerator. The cylindrical, perforated precooler and the chamber end panel are cooled by liquid nitrogen (LN₂) at 77°K. The cylindrical part of the chamber is provided with an LN₂ liner which serves as a heat shield for the helium cryopump.

The nozzles, shown in Fig. 2, were cooled with LN₂ to reduce nozzle wall boundary-layer thickness. During this test, Mach 3 and 2 nozzles were used.

The nozzle gas supply system for the test was similar to the system used in Ref. 2. The N₂ and O₂ were fed to the gas heater from standard bottles, via standard flowmeters. The gas was passed through two separate tubular gas heaters into a heated plenum chamber. The O₂ was passed through a quartz manifold where three microwave cavities dissociated part of it (Fig. 2). These cavities were powered by three 80-w microwave generators (2.5 kMc). The O₂ heater upstream of the cavities was not turned on when the power supplies were operating. The plenum chamber temperature was held at the desired reservoir temperature.

The operating range for the tests was selected so that the anticipated flight trajectory could be approximately duplicated. The ranges selected were:

$$\begin{aligned} P_o &= 100 \text{ to } 400 \mu \text{ Hg} \\ T_o &= 290 \text{ to } 700^\circ \text{K} \\ p_\infty &= 1 \text{ to } 24 \mu \text{ Hg} \\ T_\infty &= 85 \text{ to } 230^\circ \text{K} \\ Re_\infty/\text{cm} &= 2.9 \text{ to } 53 \\ M_\infty &= 1.99 \text{ to } 3.49 \\ \lambda_\infty &= 0.165 \text{ to } 1.60 \text{ cm} \\ u_\infty &= 500 \text{ to } 1000 \text{ m/sec} \\ \text{Uniform core diameter} &= 15 \text{ to } 30 \text{ cm} \end{aligned}$$

The atomic oxygen concentration in the test section was determined as described in Ref. 2. The percent of oxygen dissociation in the test section is given as a function of settling chamber pressure in Fig. 3.

SECTION IV MODELS AND PROCEDURE

The model used to simulate the release of NO from the rocket test vehicle into the atmosphere is shown in Fig. 4. The model had an orifice at the apex of a cone and is similar to the rocket vehicle which was flown after the present tests were completed. The model was connected via a supply line to gas bottles with a mixture of NO and N₂. The pressure inside the model, measured with a strain-gage pressure

transducer, was regulated with a valve near the bottles. Model pressures (p_{O_j}) ranged from 1 to 5 atm. By varying the mixture of NO and N₂ in the model the same headglow geometry (p_{O_j} and p_{O_∞} constant) could be maintained while varying the concentration of NO in the reaction region.

The overall light output of the headglow was measured with photomultiplier (PM) tubes mounted on two of the chamber Plexiglas® ports.

The headglow was photographed with 35-mm Kodak® Plus-X film with exposure times of 1/8 to 1 sec and lens openings of from f/1.9 to f/2.8.

The film and PM were calibrated with a light box which was mounted at the position of the headglow. This light box, in turn, was calibrated against a standard source at AFCRL. To provide a complete calibration over the range of exposures in the tests, a calibrated step wedge and the calibrated light box were photographed on each roll of film. A typical calibration curve is shown in Fig. 5. The transmission of the film negative relative to the light box photo transmission was obtained from microdensitometer traces of the photographic negatives, and the corresponding exposure was read from the calibration curve.

For the rate constant calculations, the volume intensity at the stagnation point was determined from the projected exposures on the negatives. The observed projected exposure (photons/cm²-sec) from the photographs can be related to the specific radial intensity (photons/cm³-sec) for the axially symmetric geometry by an Abel integral inversion. The inversion from surface brightness to radial intensity is described in Ref. 2. The film response dropped sharply at a wavelength of 0.68 μ . Since the spectrum of the glow obtained by Fontijn et al., Ref. 8, extends well beyond 0.68 μ , the measured value of the intensity was multiplied by a factor of 2.5 to account for the film response.

SECTION V EXPERIMENTAL RESULTS

A typical photograph of the headglow is shown in Fig. 6. The sketch in Fig. 7 indicates the general flow characteristics. A spherical shell-like area around the contact surface between the two gas streams is the reaction zone.

With this configuration, the following investigations were carried out:

- A. Spectrometric measurements in the visible regime of the head-glow. These were obtained by Dr. F. P. DelGreco of AFCRL, and no results are reported here.
- B. Initial infrared spectrometric measurements were carried out by Dr. A. T. Stair et al. of AFCRL. These runs were of an exploratory nature, but demonstrated the use of the wind tunnel for investigations of the rotational-vibrational structure of gases. Typical cases covered are:

<u>Wind Tunnel Flow</u>	<u>Flow from Model</u>	<u>Reaction of Interest</u>
O ₂ , N ₂ , O	N ₂ , NO	O + NO
O ₂ , N ₂ , O	CO	O + CO
N ₂ , N	NO	N + NO
N ₂ , N	CO	N + CO
N ₂ , N	O ₂	N + O ₂

Atomic nitrogen was produced in the same manner as atomic oxygen.

- C. A total of 103 runs were made to measure the radiation attributable to the reaction of NO and O. The major results of this series are discussed here.

The overall radiation output of the headglow is plotted versus the ratio of NO pressure to total pressure in the model in Figs. 8 and 9. These figures represent the typical behavior. On the basis of limited results, it was stated in Ref. 2 that the photomultiplier reading was proportional to the NO concentration, as would be expected from the second-order reaction of NO + O. Beyond a "saturation" point, a further increase in p_{NO} does not produce a further net radiation increase. Although this "saturation" effect is confirmed by the present experiments, the decrease of the PM reading with decreasing p_{NO} was far more rapid than expected. The low values of $p_{\text{NO}}/p_{\text{O}_j}$ were obtained by pre-mixing NO and N₂ in separate bottles. One possible explanation of the above behavior would be the presence of impurities, reacting with NO, in the nitrogen bottles, which would reduce the effective NO concentration. Chemical analysis after the test on similar bottles indicated that the impurities were not sufficient to produce the observed fast decrease of radiation. A series of tests with high purity NO and N₂ is required to eliminate this possibility completely.

The right-hand sides of Figs. 8 and 9 give typical photon production rates per unit volume as obtained from photographs versus the ratio of $[NO]/[O]$. Note that for the data in these figures only $[NO]$ was varied. The value of $[O]$ and the headglow geometry are constant.

The rate constant, k , is defined by:

$$k = \frac{\Phi}{1/2[NO] \ 1/2[O]}$$

where Φ is the photon production rate per unit volume at the brightest point, near the stagnation point. Half the values of the concentrations of O and NO on either side of the contact surface were used as a first approximation to the actual concentrations at the point of maximum light intensity.

Lines of constant k are drawn in Figs. 8 and 9. All values of k , determined from photographs, are summarized in Fig. 10.

In considering this figure, the following must be noted:

- A. There was no distinct trend for points obtained with constant value of $[NO]/[O]$. Therefore, in this figure, all photon rates are plotted indiscriminately.
- B. The $M = 2$ nozzle was installed to provide data at a higher stagnation (reaction) pressure, but this nozzle had a very poor exit velocity profile at the higher pressures. Since only stagnation point data are plotted here, this effect is expected to be minor, but the data in the high pressure regime ($p'_0 > 100 \mu \text{ Hg}$) need confirmation with an improved nozzle.

Allowing for the above uncertainties, it seems nevertheless evident that the production of excited NO_2 molecules is highly quenched as the pressure in the reaction zone is increased. For comparison, the reaction rates obtained in chemical flow tubes at higher pressures, Kaufman, Ref. 10, and Fontijn et al., Ref. 8, are shown.

Kistiakowski and Volpi obtained a value of $k = 1.6 \times 10^{-11}$ for $NO + O \rightarrow NO_2$ with a mass spectrometer in their approximation to a "stirred" reaction vessel, Ref. 11. If that value were valid over the complete pressure range of Fig. 10, it would constitute the maximum value of $NO + O \rightarrow NO_2^* \rightarrow NO_2 + h\nu$; that is, the case in which all the formed NO_2 molecules are excited and assuming that in the deactivation process only one photon is emitted.

SECTION VI

CONCLUDING REMARKS

The present series of tests and the tests reported in Ref. 2 have simulated the AFCRL high altitude rocket flights, and correlations have been developed for analyses of flight data, Refs. 3 and 5. Several differences between rate constants observed in the wind tunnel and the rate constants observed in the flow tube need further exploration. The data presented here indicate that there is a strong effect of pressure on the reaction.

REFERENCES

1. Golomb, D., Rosenberg, N. W., Aharonian, C., Hill, J. A. F., and Alden, H. L. "Oxygen Atom Determination in the Upper Atmosphere by Chemiluminescence of Nitric Oxide." J. Geoph. Res., Vol. 70, No. 5, March 1965, pp. 1155-1173.
2. van der Blik, J. A. and Cassanova, R. A. "Simulation of Chemiluminescent Reaction of Nitric Oxide with Atomic Oxygen in a Supersonic Low Density Wind Tunnel - Interim Report." AEDC-TR-66-105 (AD636982), August, 1966.
3. Golomb, D., and Good, R. E. "Upper Atmosphere O-Atom Density by Wind Tunnel Simulation of Nitric Oxide Releases." J. Geoph. Res., accepted for publication, 1966.
4. DelGreco, F. P., Golomb, D., van der Blik, J. A., Cassanova, R. A. and Good, R. E. "NO-O Chemiluminescent Reaction in a Low-Density Wind Tunnel." J. of Chem. Phys., Vol. 44, No. 11, June 1, 1966, pp. 4349-4350.
5. Good, R. E. and Hill, J. A. F. "A Wind Tunnel Investigation of the Nitric Oxide-Oxygen Atom Reaction." MC-64-116-R1, Mithras, Inc., March 1966, AFCRL 66-284.
6. van der Blik, J. A., Cassanova, R. A., Golomb, D., DelGreco, F. P., Hill, J. A. F., and Good, R. E. "The Chemiluminescent Reaction of NO with O in a Supersonic Low Density Wind Tunnel." Fifth Int. Symp. on Rarefied Gas Dynamics, Oxford, July 4-8, 1966. To be published by Academic Press.
7. Jursa, A. S., Nakamura, M. and Tanaka, Y. "Molecular Oxygen Distribution in the Upper Atmosphere, 2." J. Geoph. Res., Vol. 70, No. 11, June 1, 1965, pp. 2699-2702.

8. Fontijn, A., Meyer, C. B., and Schiff, H. I. "Absolute Quantum Yield Measurements of the NO-O Reaction and Its Use as a Standard for Chemiluminescent Reactions." J. of Chem. Phys., Vol. 40, No. 1, January 1964, pp. 64-70.
9. Spindler, G. B. "Observations on the Release of Nitric Oxide in the E-Region." Planet. & Space Sci., 1966, Vol. 14, pp. 53-64.
10. Kaufman, F. "The Air Afterglow and Its Use in the Study of some Reactions of Atomic Oxygen." Proc. Royal Soc., Vol. 247A, 1958, p. 123-139.
11. Kistiakowsky, G. B. and Volpi, G. G. "Reactions of Nitrogen Atoms. I. Oxygen and Oxides of Nitrogen." J. of Chem. Phys. Vol. 27, No. 5, Nov. 1957, pp. 1141-1149.

**APPENDIX
ILLUSTRATIONS**

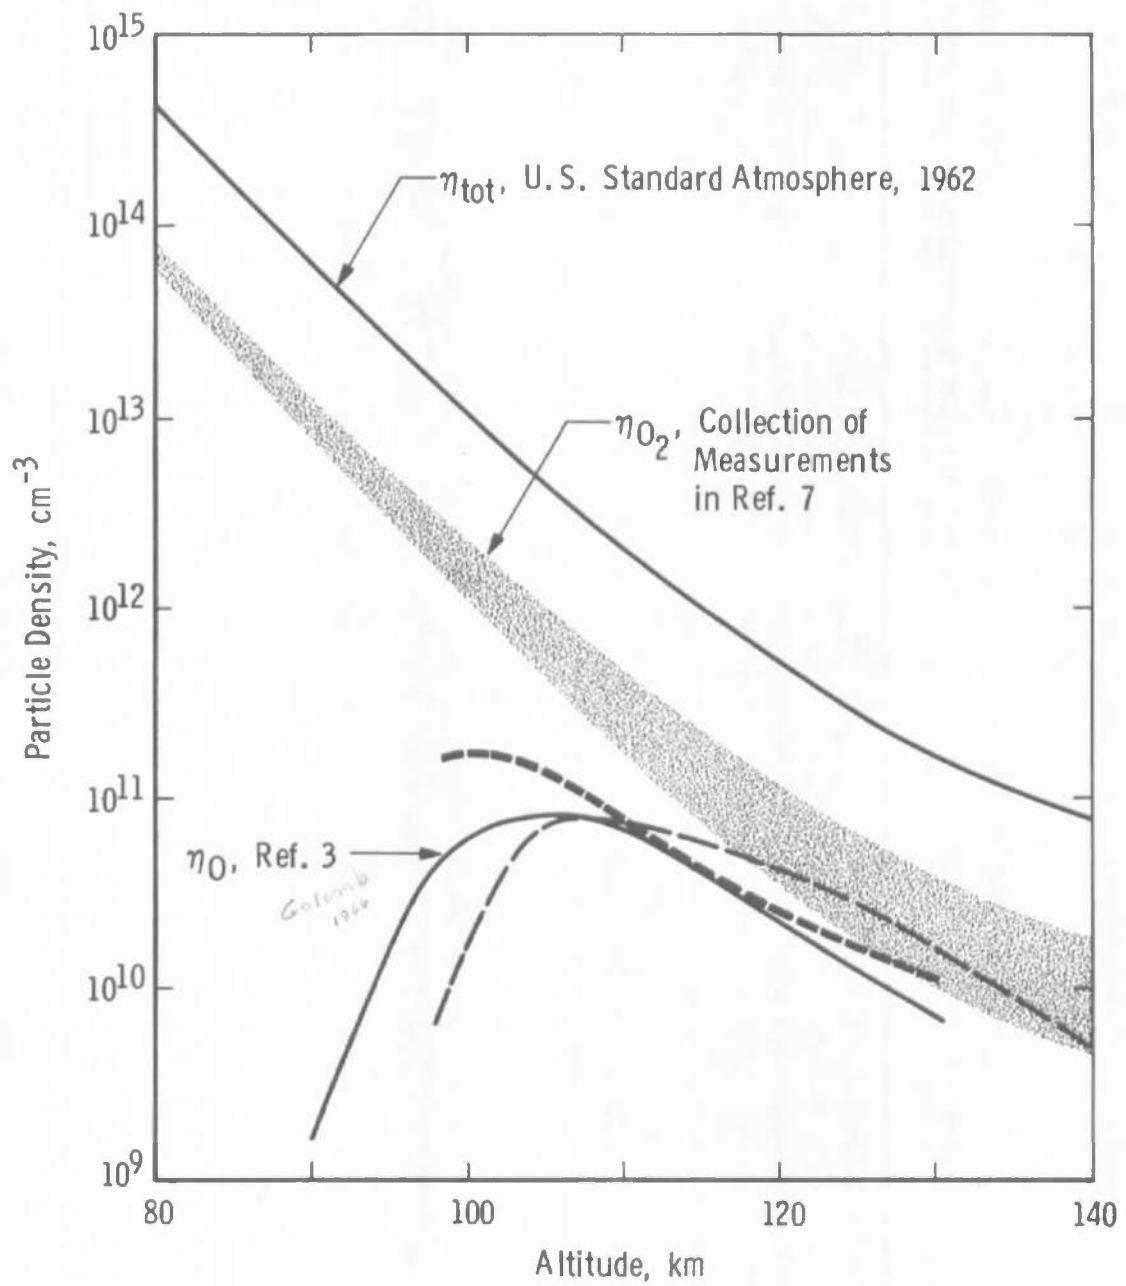


Fig. 1 Summary of Atomic and Molecular Oxygen Measurements

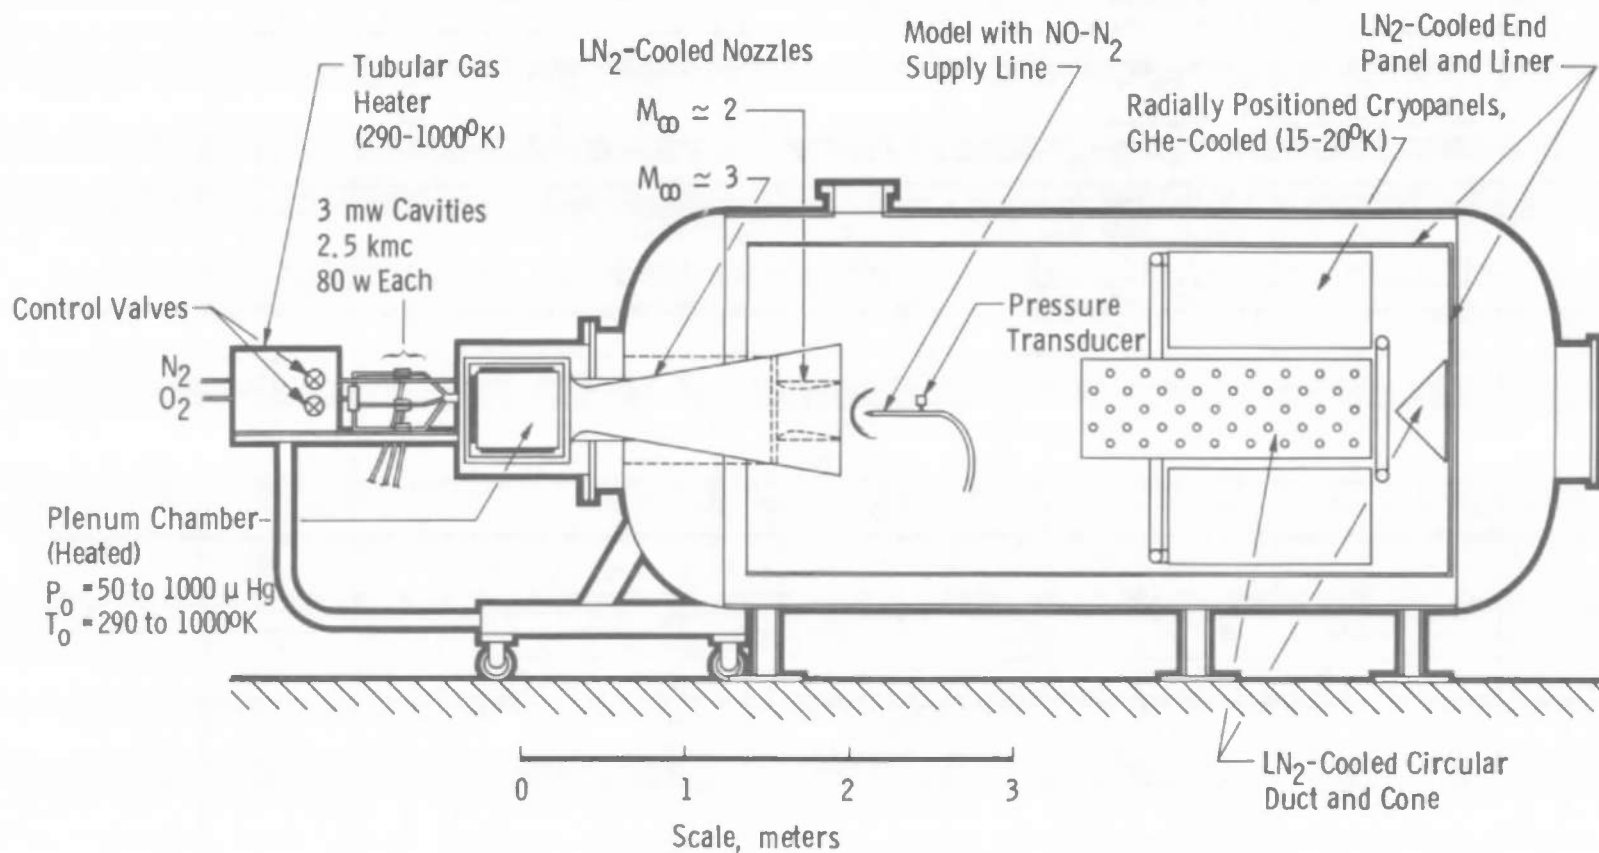


Fig. 2 Schematic of Low Density Tunnel (Aerospace Research Chamber (8V))

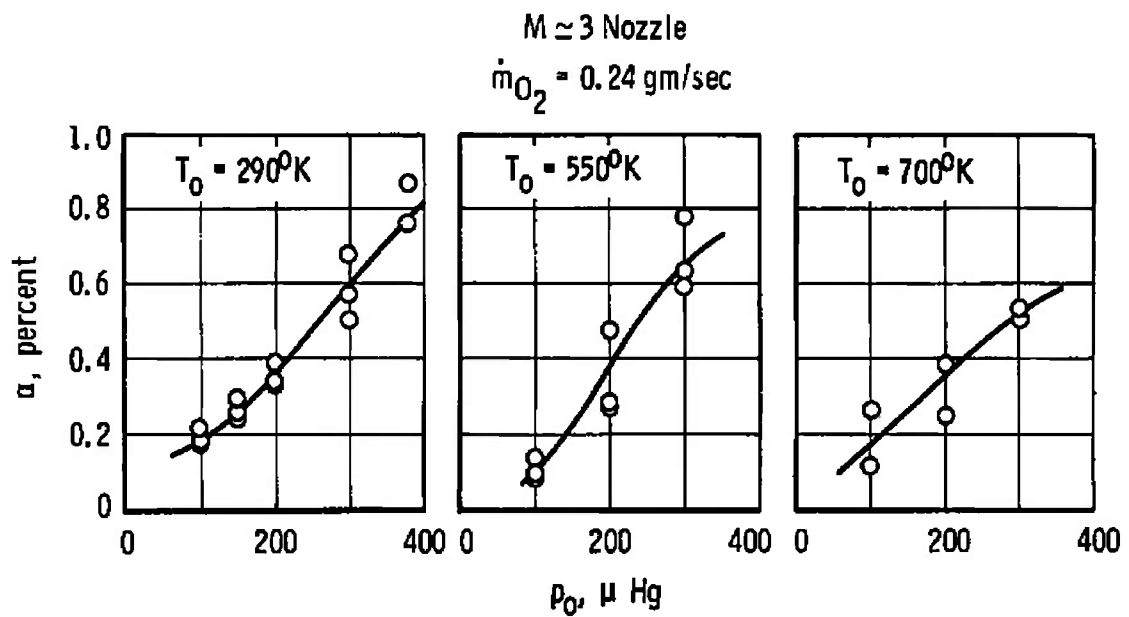
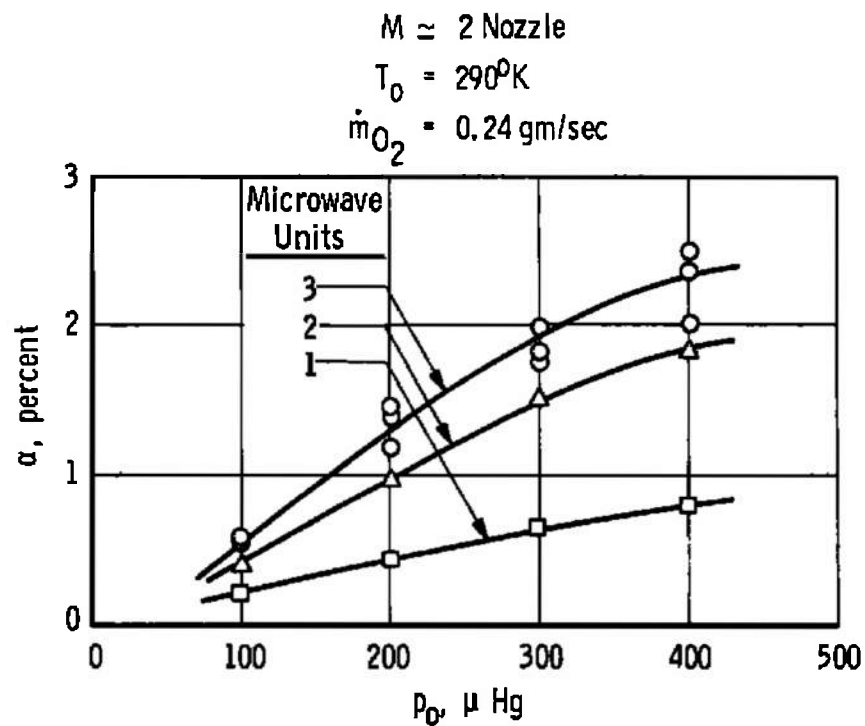


Fig. 3 Atomic Oxygen Calibration Results

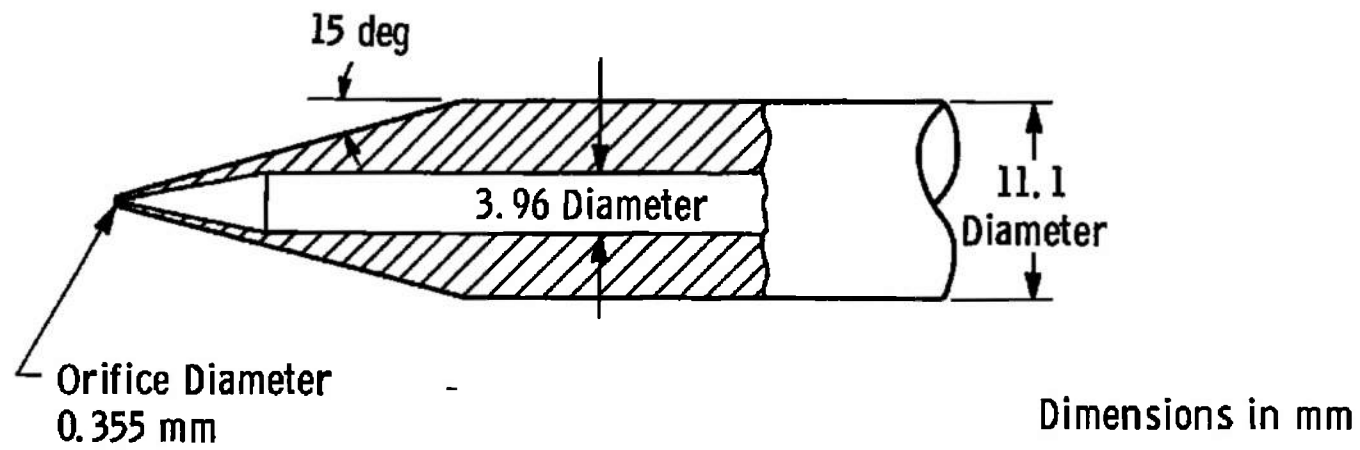


Fig. 4 Geometry of Test Model

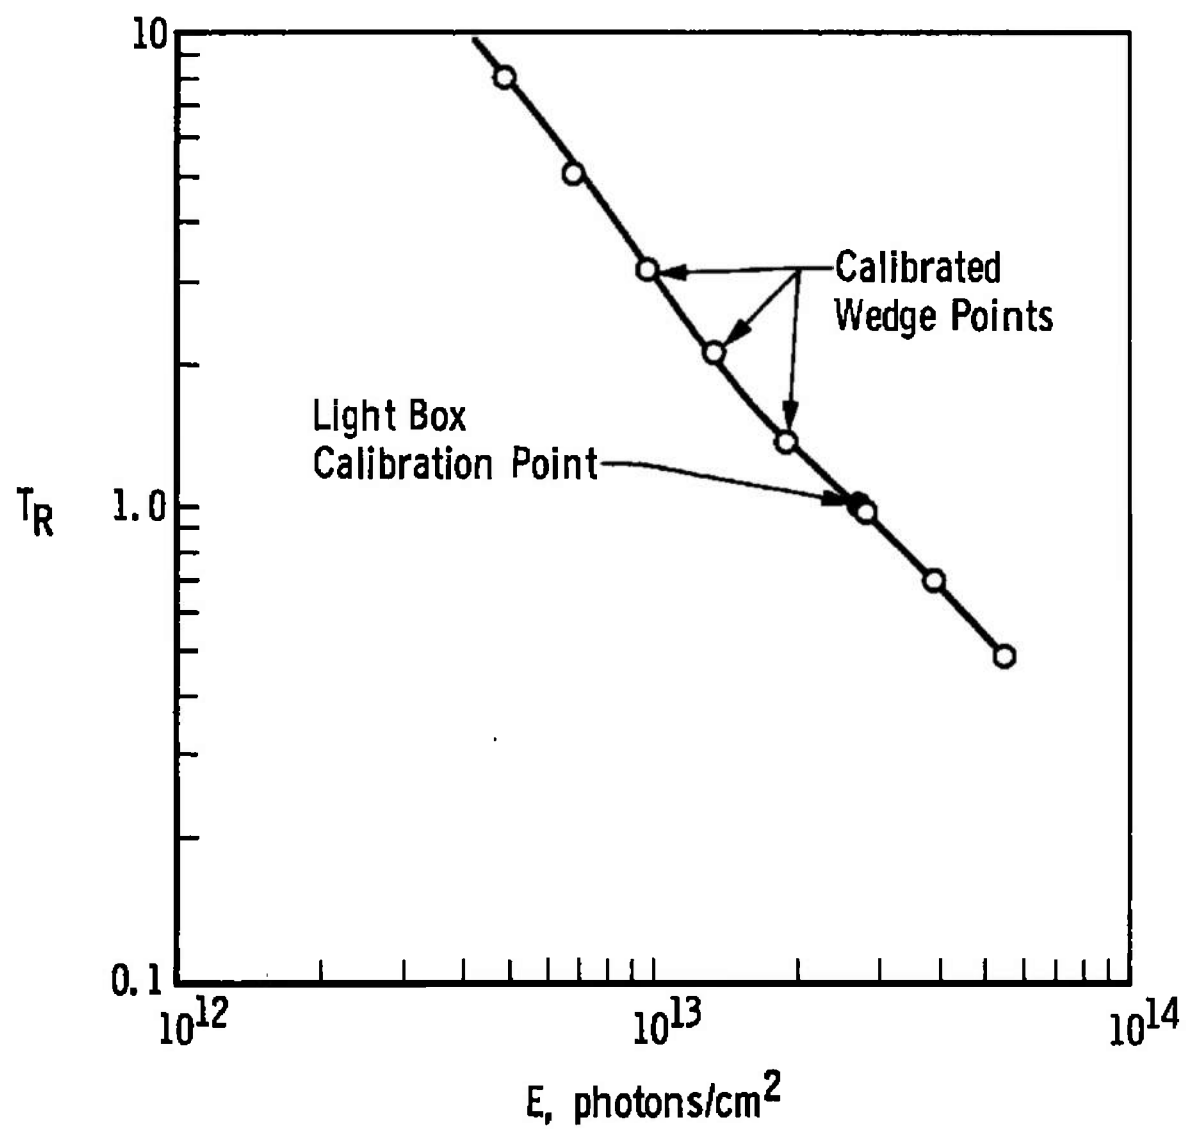


Fig. 5 Film Negative Calibration



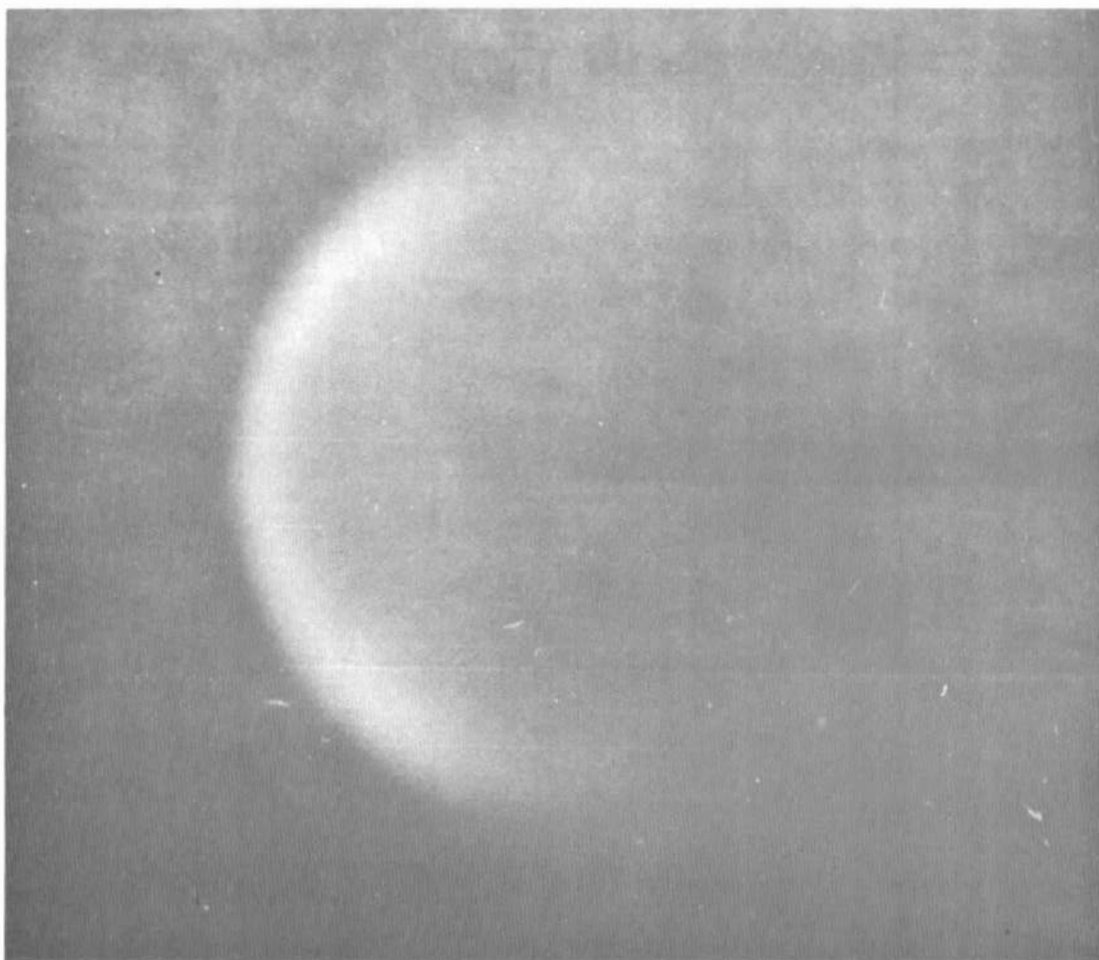


Fig. 6 Typical Photograph of Headglow

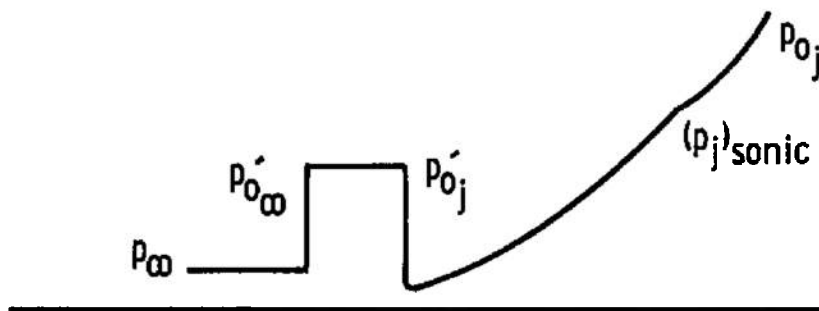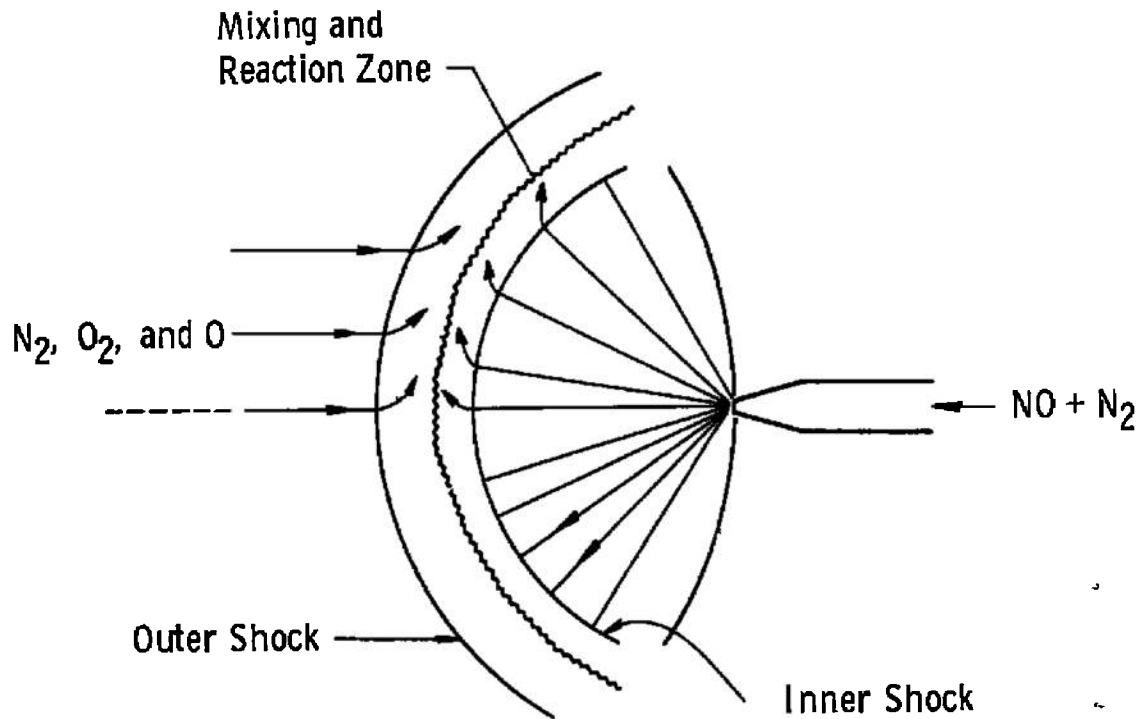

Pressure Distribution along Centerline
(Not to Scale)

Fig. 7 Sketch of Headglow Flow Field

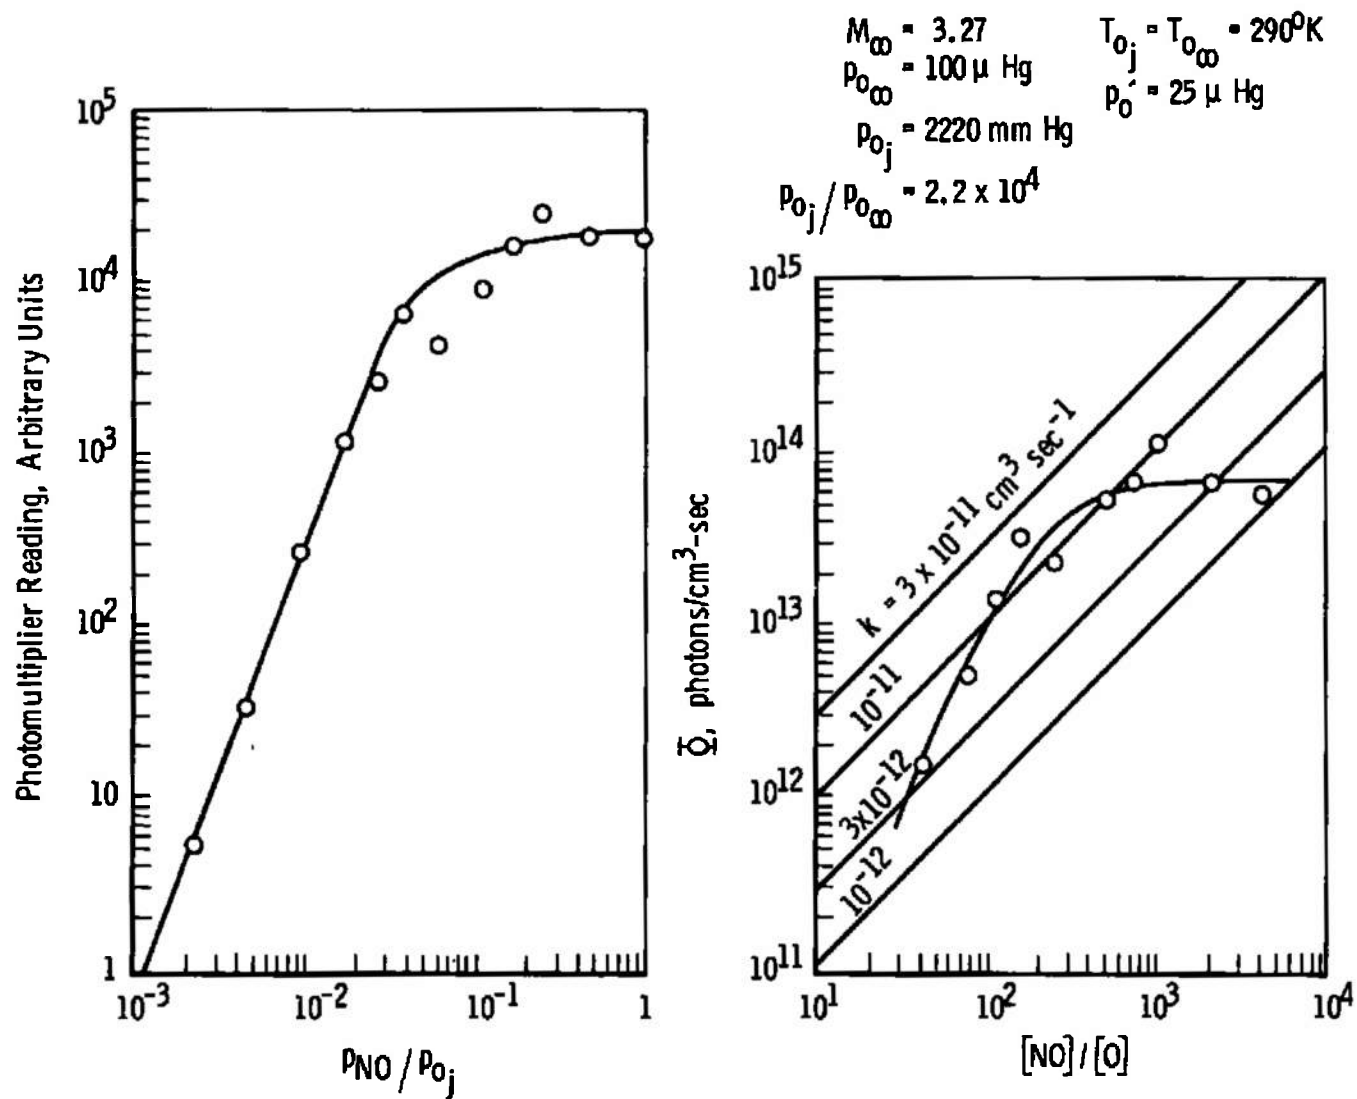


Fig. 8 Typical Variation of Headglow Radiation with NO Concentration in Forward Jet, $p_{O'} = 25 \mu \text{ Hg}$

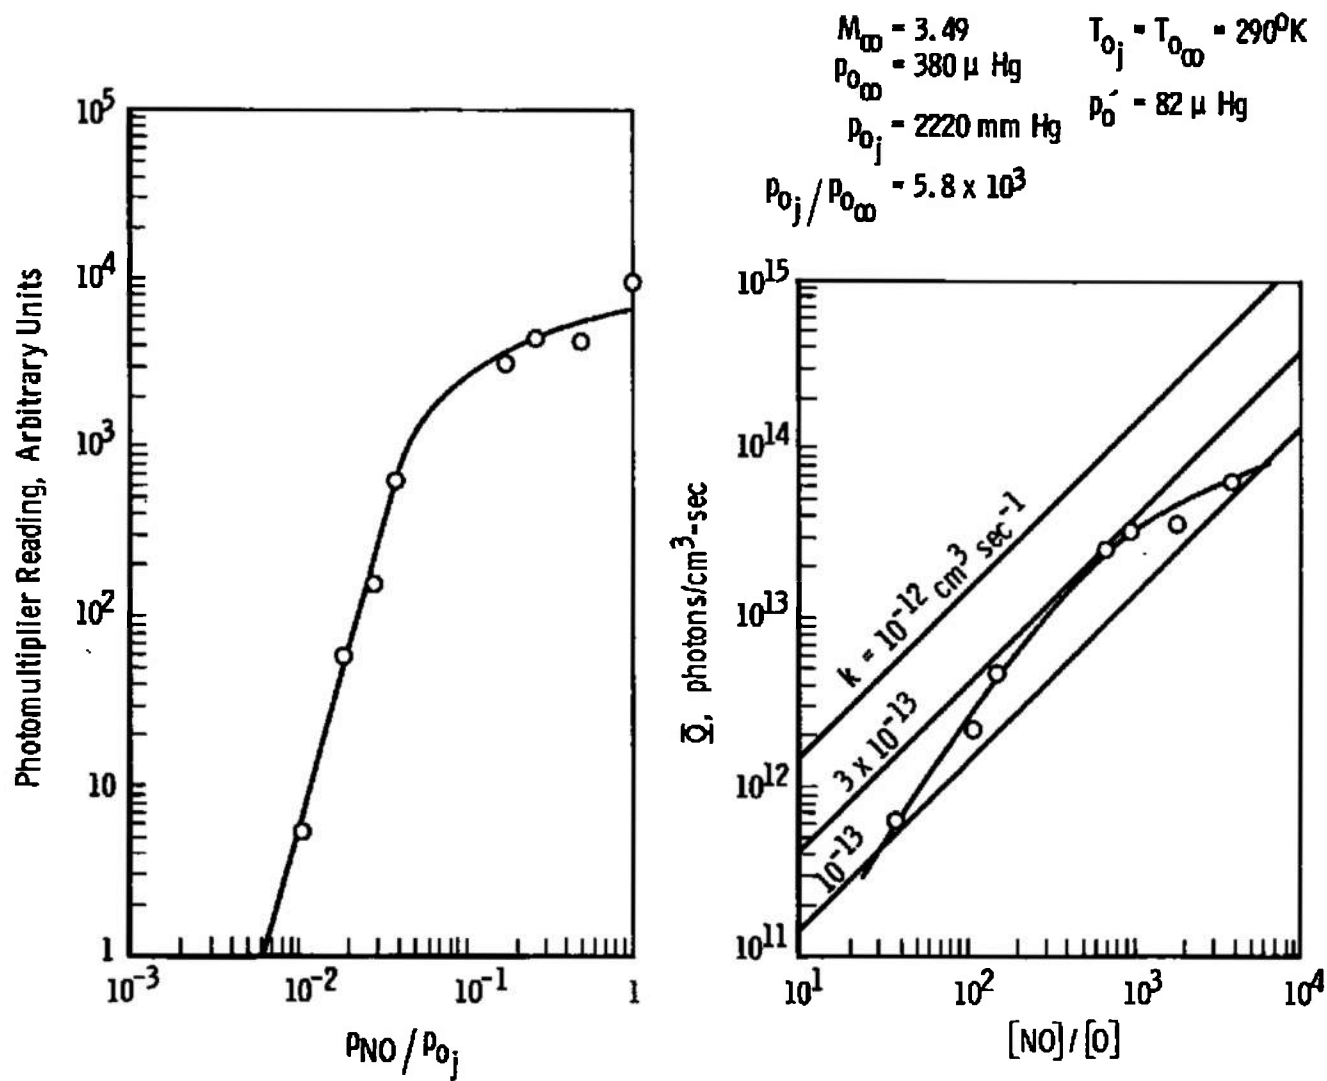


Fig. 9 Typical Variation of Headglow Radiation with NO Concentration in Forward Jet, $P_{O'} \approx 82 \mu \text{ Hg}$

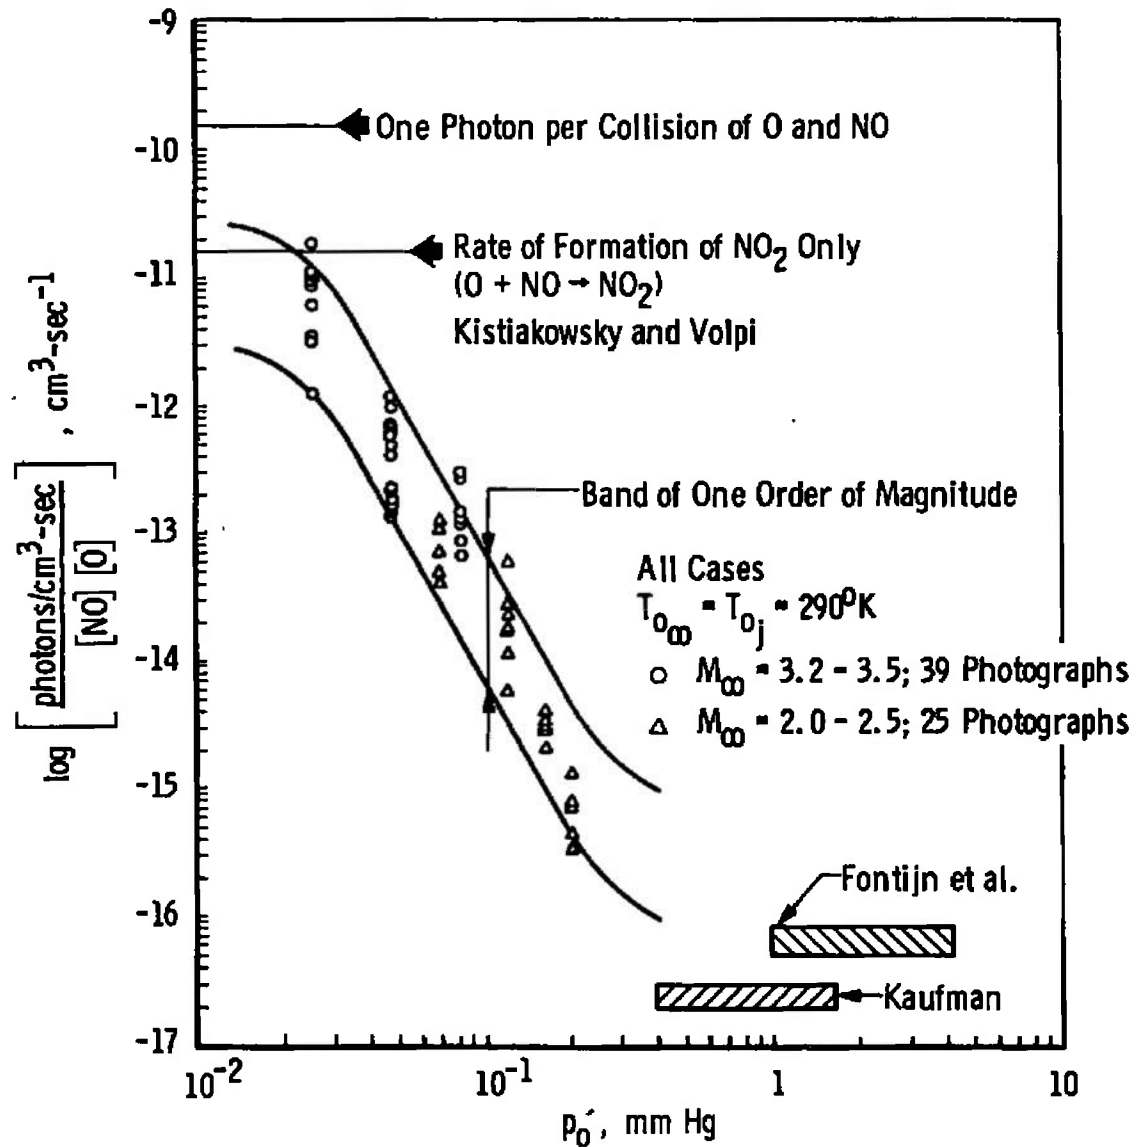


Fig. 10 Summary of Photon Production Rates at Stagnation Point, Determined from Photographs

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP N/A	
3. REPORT TITLE SIMULATION OF CHEMILUMINESCENT REACTION OF NITRIC OXIDE WITH ATOMIC OXYGEN IN A SUPERSONIC LOW DENSITY WIND TUNNEL - PART 2			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5. AUTHOR(S) (Last name, first name, initial) van der Bliek, Jan A. and Cassanova, Robert A., ARO, Inc.			
6. REPORT DATE January 1967		7a. TOTAL NO. OF PAGES 26	7b. NO. OF REFS 11
8a. CONTRACT OR GRANT NO. AF 40(600)-1200		8a. ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-66-254	
b. PROJECT NO. 7635			
c. Program Element 62405424		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
d.			
10. AVAILABILITY/LIMITATION NOTICES Distribution of this report is unlimited.			
11. SUPPLEMENTARY NOTES Available in DDC.		12. SPONSORING MILITARY ACTIVITY AF Cambridge Research Laboratory Air Force Systems Command Hanscom Field, Bedford, Mass.	
13. ABSTRACT Low density wind tunnel tests were carried out at Mach 2 and 3 to simulate the release of nitric oxide in the upper atmosphere from a sounding rocket. The supersonic flow contained atomic oxygen, and the wall-less chemiluminescent reaction of O with NO was investigated. Reaction rate constants thus obtained were up to 5 orders of magnitude higher than previously obtained laboratory rate constants. This is an extension of the work reported in AEDC-TR-66-105.			

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
chemiluminescence nitric oxide oxygen supersonic flow wind tunnel testing headglow sounding rockets						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.